



Job Location:

Solids Enforcer 300 SE 300

LARGE CAPACITY HDPE SOLIDS INTERCEPTOR

Specification: Solids Enforcer Model # SE 300, solid interceptor with 300 gallon solids design capacity. Interceptor has a limited lifetime warranty and is made in the USA out of seamless, rotationally molded High Density Polyethylene with 3/8" uniform wall thickness. Interceptor designed for above or below ground installation. Interceptor includes a dual adjustable lid system and multiple outlet options. Steel encased composite lid provides a water / gas tight seal and have a minimum of 20,000 lbs. load capacity. The lid is designed in accordance with the loading requirements of AASHTO H20.

Function: Used in Restaurants, Food Service operations, Commercial Kitchens and Maintenance facilities to receive wastewater that contains food partials (solids), sand or other sediment. Sediment and debris is collected. Regular maintenance is required to keep the interceptor functioning. Interceptor may be installed in the ground, semi recessed, or flush with the floor. Narrow width permits access through doorways and down stairwells. High Density Polyethylene construction ensures a lightweight installation process (two people can move and install it).

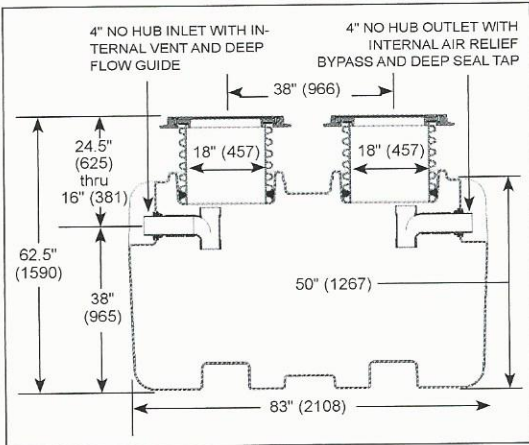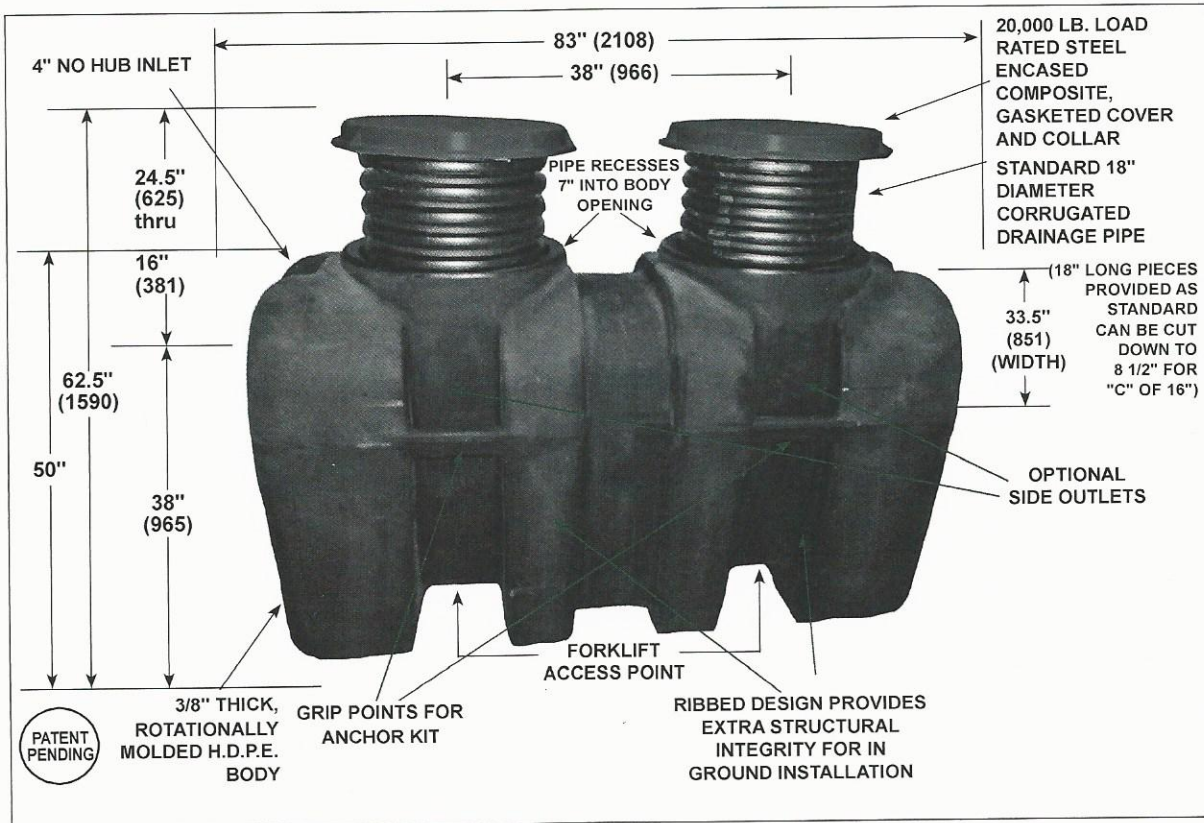

MODEL NO.	SOLIDS CAPACITY (GAL)	SHIPPING WEIGHT (Lbs.)
SE 300	300	275

SUFFIX OPTIONAL VARIATIONS

- AK High water anchor kit (set of two)
- C Lid extension (specify "C" dimension required)
- CL Hold down brackets for lid (when installed above ground)
- DI Ductile iron lid and collar
- FL-C Membrane clamp kit
- LHSI 4" no hub inlet on left hand side
- LHSO 4" no hub outlet on left hand side
- OP Internal flow control*
- RHSI 4" no hub inlet on right hand side
- RHSO 4" no hub outlet on right hand side
- SB Sediment bucket
- SP External Sampling Port
- T Female threaded connections



Job Name: _
 Section No: _
 Schedule No: _

Page No: _
 Contractor: _
 Purchase Order No: _