



Project Name: _

Solids Enforcer 140 SE 140

LARGE CAPACITY HDPE SOLID INTERCEPTOR

Specification: Solids Enforcer 140 Model # SE 140, solids interceptor with 140 gallon solids design capacity. Interceptor has a limited lifetime warranty and is made in the USA out of seamless, rotationally molded High Density Polyethylene with 3/8" uniform wall thickness. Interceptor designed for above or below ground installation. Interceptor includes an adjustable lid system, and multiple outlet options. The steel encased composite lid provides a water / gas tight seal and has a minimum of 20,000 lbs. load capacity. The lid is designed in accordance with the loading requirements of AASHTO H20.

Function: Used in Restaurants, Food Service operations, Commercial Kitchens and Maintenance facilities to receive wastewater that contains food partials (solids), sand or other sediment. Sediment and debris is collected. Regular maintenance is required to keep the interceptor functioning. Interceptor may be installed in the ground, semi recessed, or flush with the floor. Narrow width permits access through doorways and down stairwells. High Density Polyethylene construction ensures a lightweight installation process (two people can move and install it).

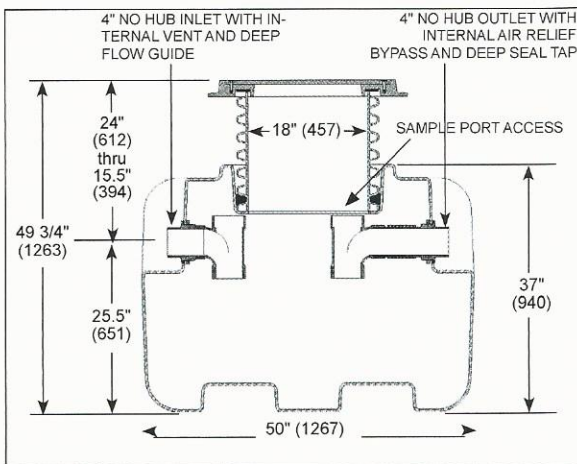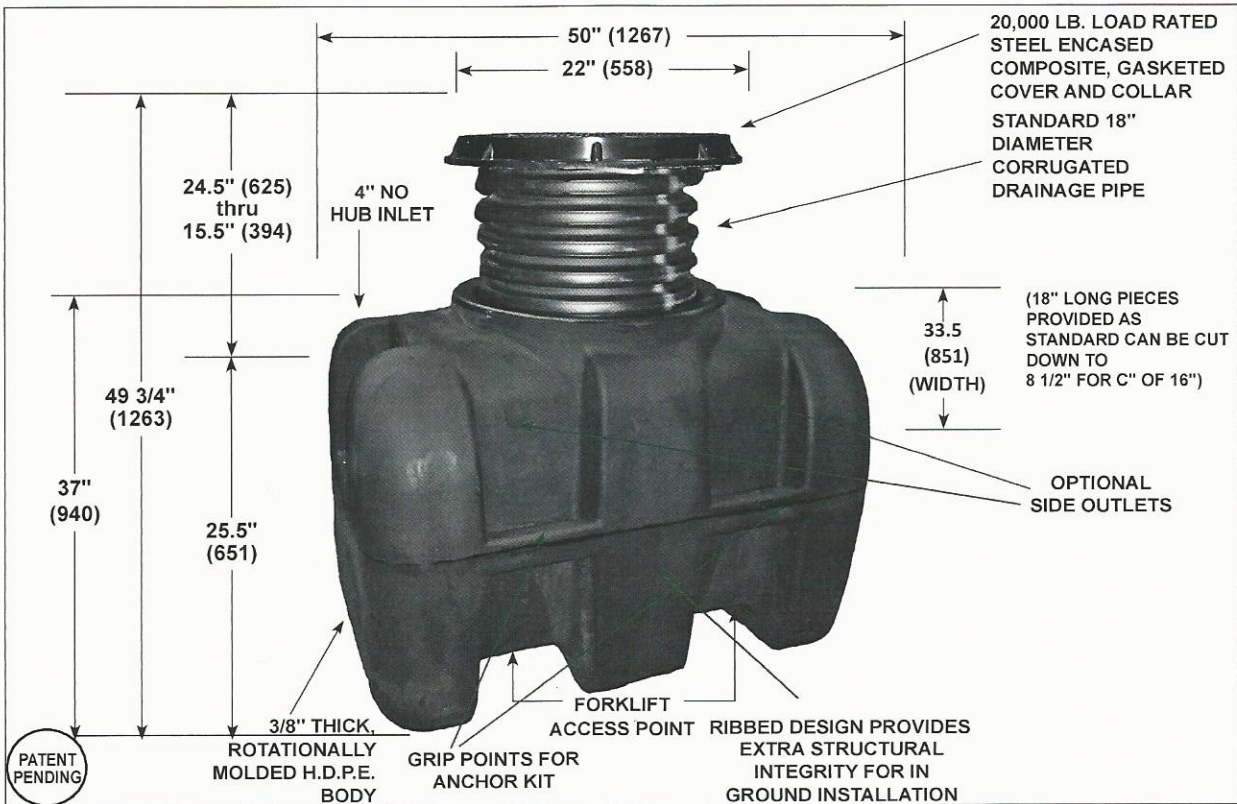

MODE L NO.	SOLIDSCAPACITY (GAL)	SHIPPING WEIGHT (Lbs.)
SE140	140	150

SUFFIX OPTIONAL VARIATIONS

- AK High water anchor kit (set of two)
- C Lid extension (specify "C" dimension required)
- CL Holddown brackets for lid (when installed above ground)
- DI Ductile iron lid & collar
- FL-C Membrane clamp kit
- LHSI 4" no hub inlet on left hand side
- LHSO 4" no hub outlet on left hand side
- OP Internal flow control*
- RHSI 4" no hub inlet on right hand side
- RHSO 4" no hub outlet on right hand side
- SB Sediment bucket
- SP External Sample Port
- T Female threaded connections



Job Name: _

Page No: _

Section No: _

Contractor: _

Schedule No: _

Purchase Order No: _